


# CONNECTING THE **SWIFT® 5000** TO THE **SWEC**



## INSTALLATION INSTRUCTIONS:

- 1 Connect the 25-pin flat-ribbon cable with edge connector to the elevator controller and male side of the RS-232 Null Modem
- 2 Connect the female side of the RS-232 Null Modem to the 25-pin side of the DB 25-9 Converter
- 3 Connect the 9-pin Serial cable to the 9-pin side of the DB 25-9 Converter
- 4 Connect the other end of the 9-pin cable to the female 9-pin port on the SWEC board
- 5 Connect the CAT5e cable from the network jack or direct line to the SWEC board
- 6 Connect two 18-gauge wires from the SWEC to the Controller from 24COM - VC and +24V to V+

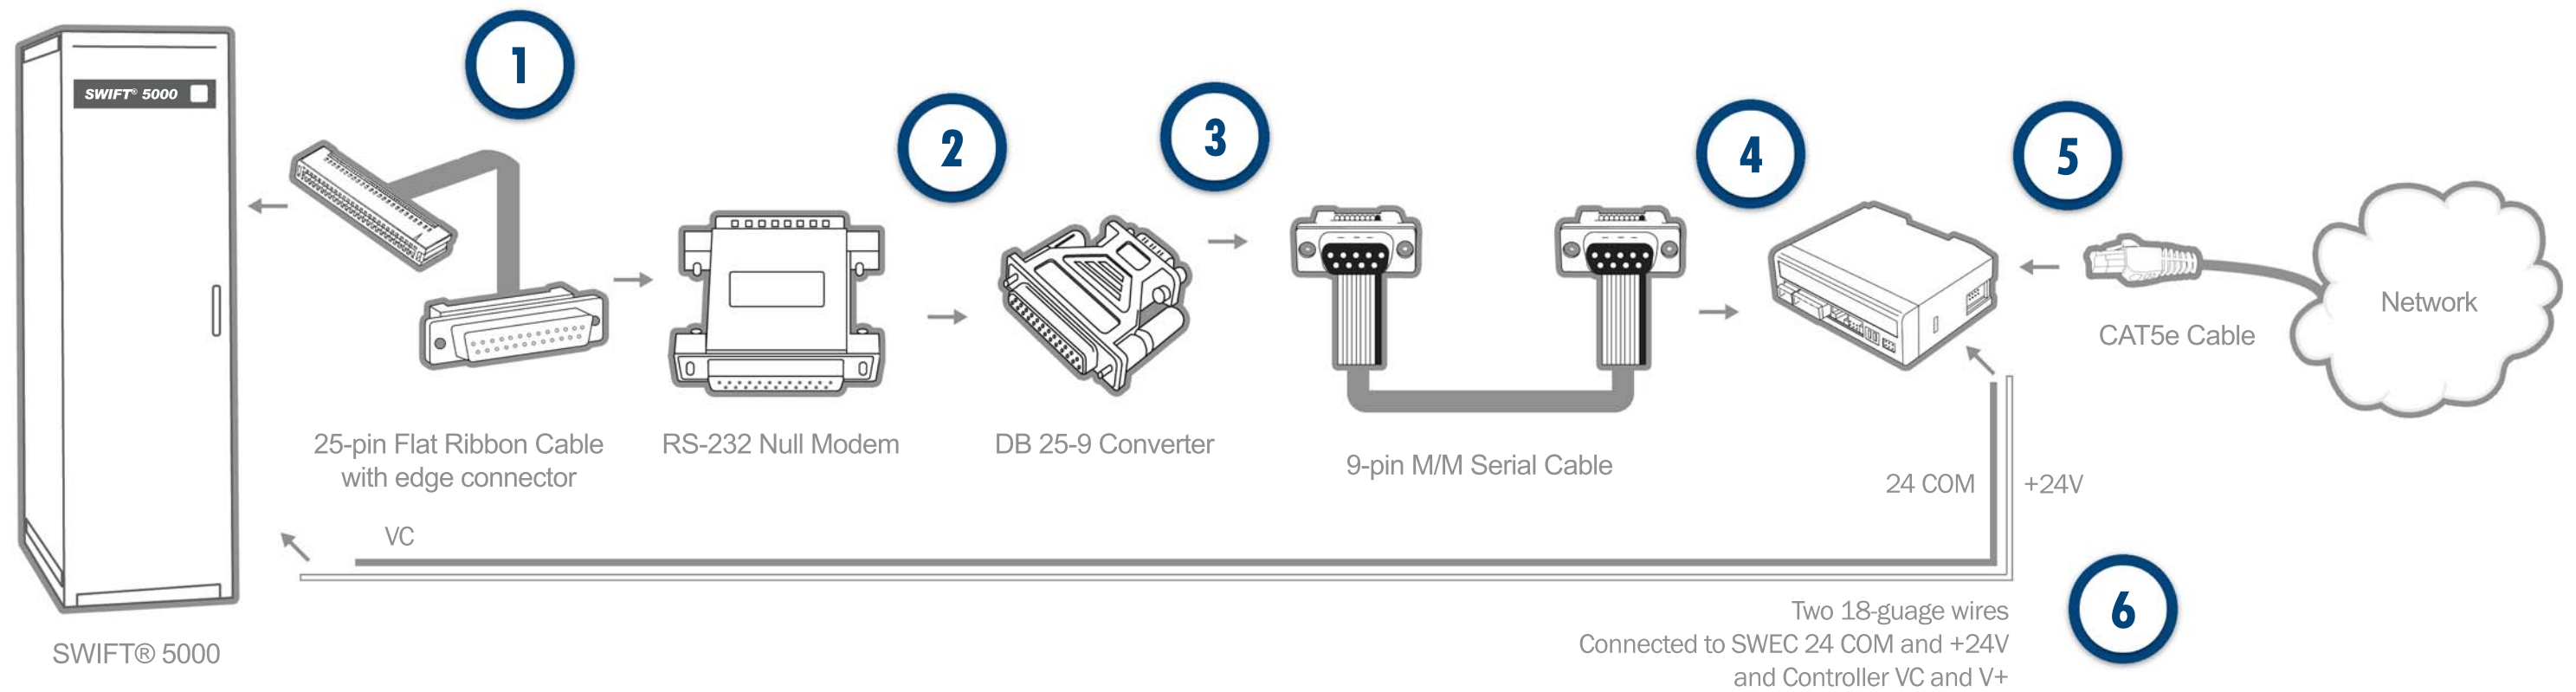

**COMPUTERIZED ELEVATOR CONTROL CORP.**  
Moving People. Moving Business.